

DS-QAZ1MP7G1 Network Paging Microphone



- 7-inch color IPS touch screen, resolution: 1024 × 600
- Support real-time broadcasting, speaking, or playing media library files on specified partitions or terminals
- One or more terminals can be selected, and shortcut keys can be set to broadcast, up to 6 shortcut options (F1 to F6) can be defined
- 1-channel gooseneck microphone audio input, 1-channel 4-segment 3.5 mm audio input
- 1-channel local speaker audio output, 1-channel 3.5 mm audio output
- Support logging in through an account and password
- Support parameter setting, account management, system maintenance, and other operations
- Support long press (for 3 seconds) one-key emergency call to emergency call designated terminals or all terminals





▪ Specification

Protocol	
Network Protocol	ISAPI, ISUP
Function	
Audio Bit Rate	G.711U, 64 Kbps Sampling bit width: 16 bits
Echo Cancellation	Yes
Network	
Client	HikCentral Professional
Interface	
Network Interface	1
Local Storage	Support TF card
Button	Physical buttons and on-screen buttons
Display Screen	IPS, 7 inches, 1024 × 600, touch screen
General	
Power	12 VDC, max.10 W
System Requirement	Embedded operating system
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Operating Humidity	10% to 90%

▪ Available Model

DS-QAZ1MP7G1

▪ Dimension

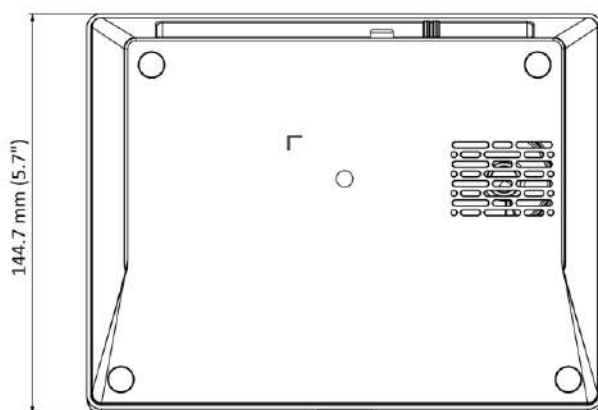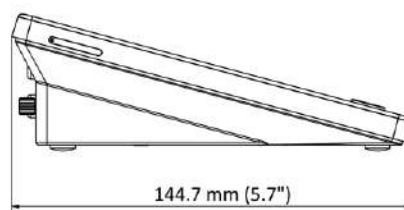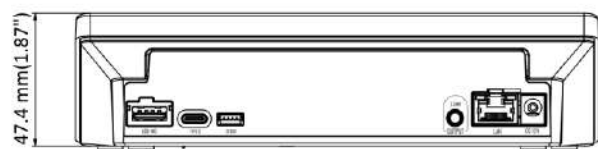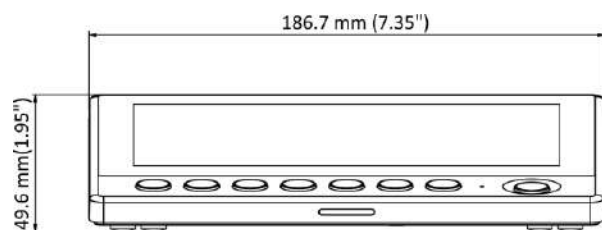

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION