



Professional Audio Video Manufacturer

AV Record and Camera Tracking System


PRODUCT DATASHEET




VISSONIC ELECTRONICS LTD.

Think Solutions

Application diagram

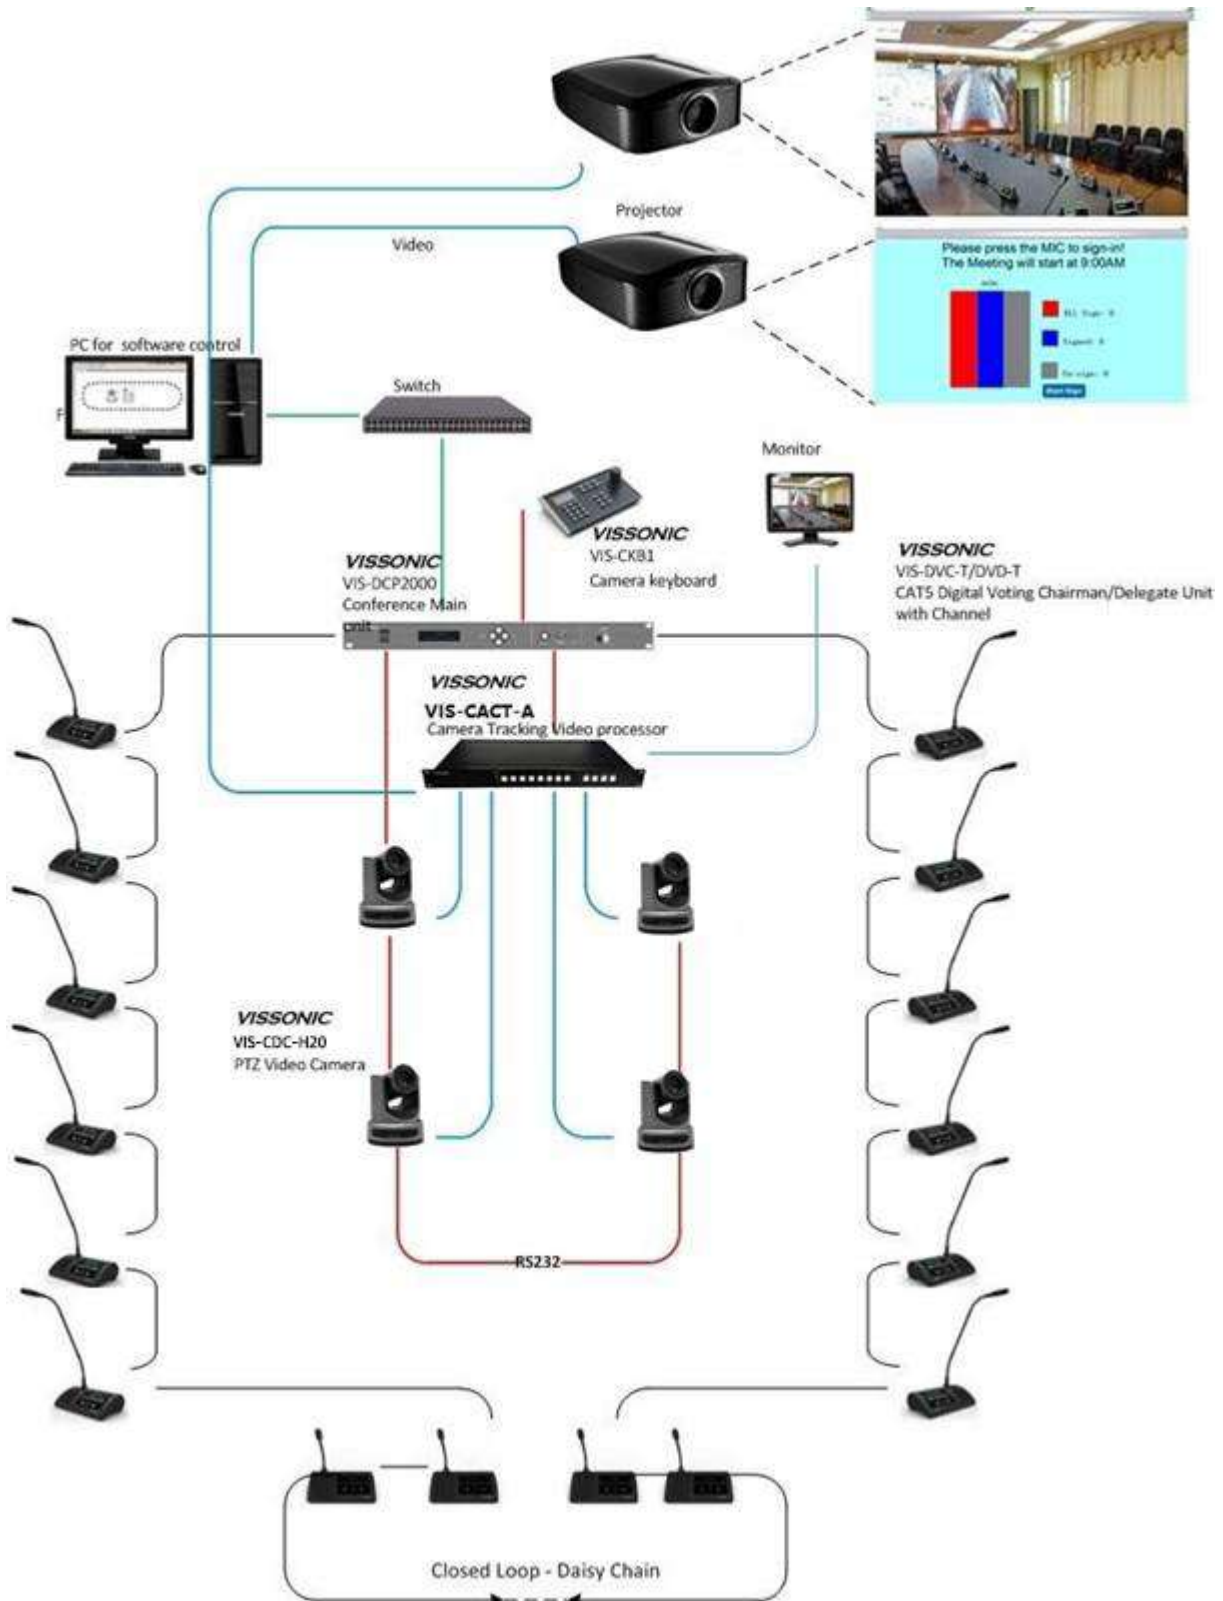

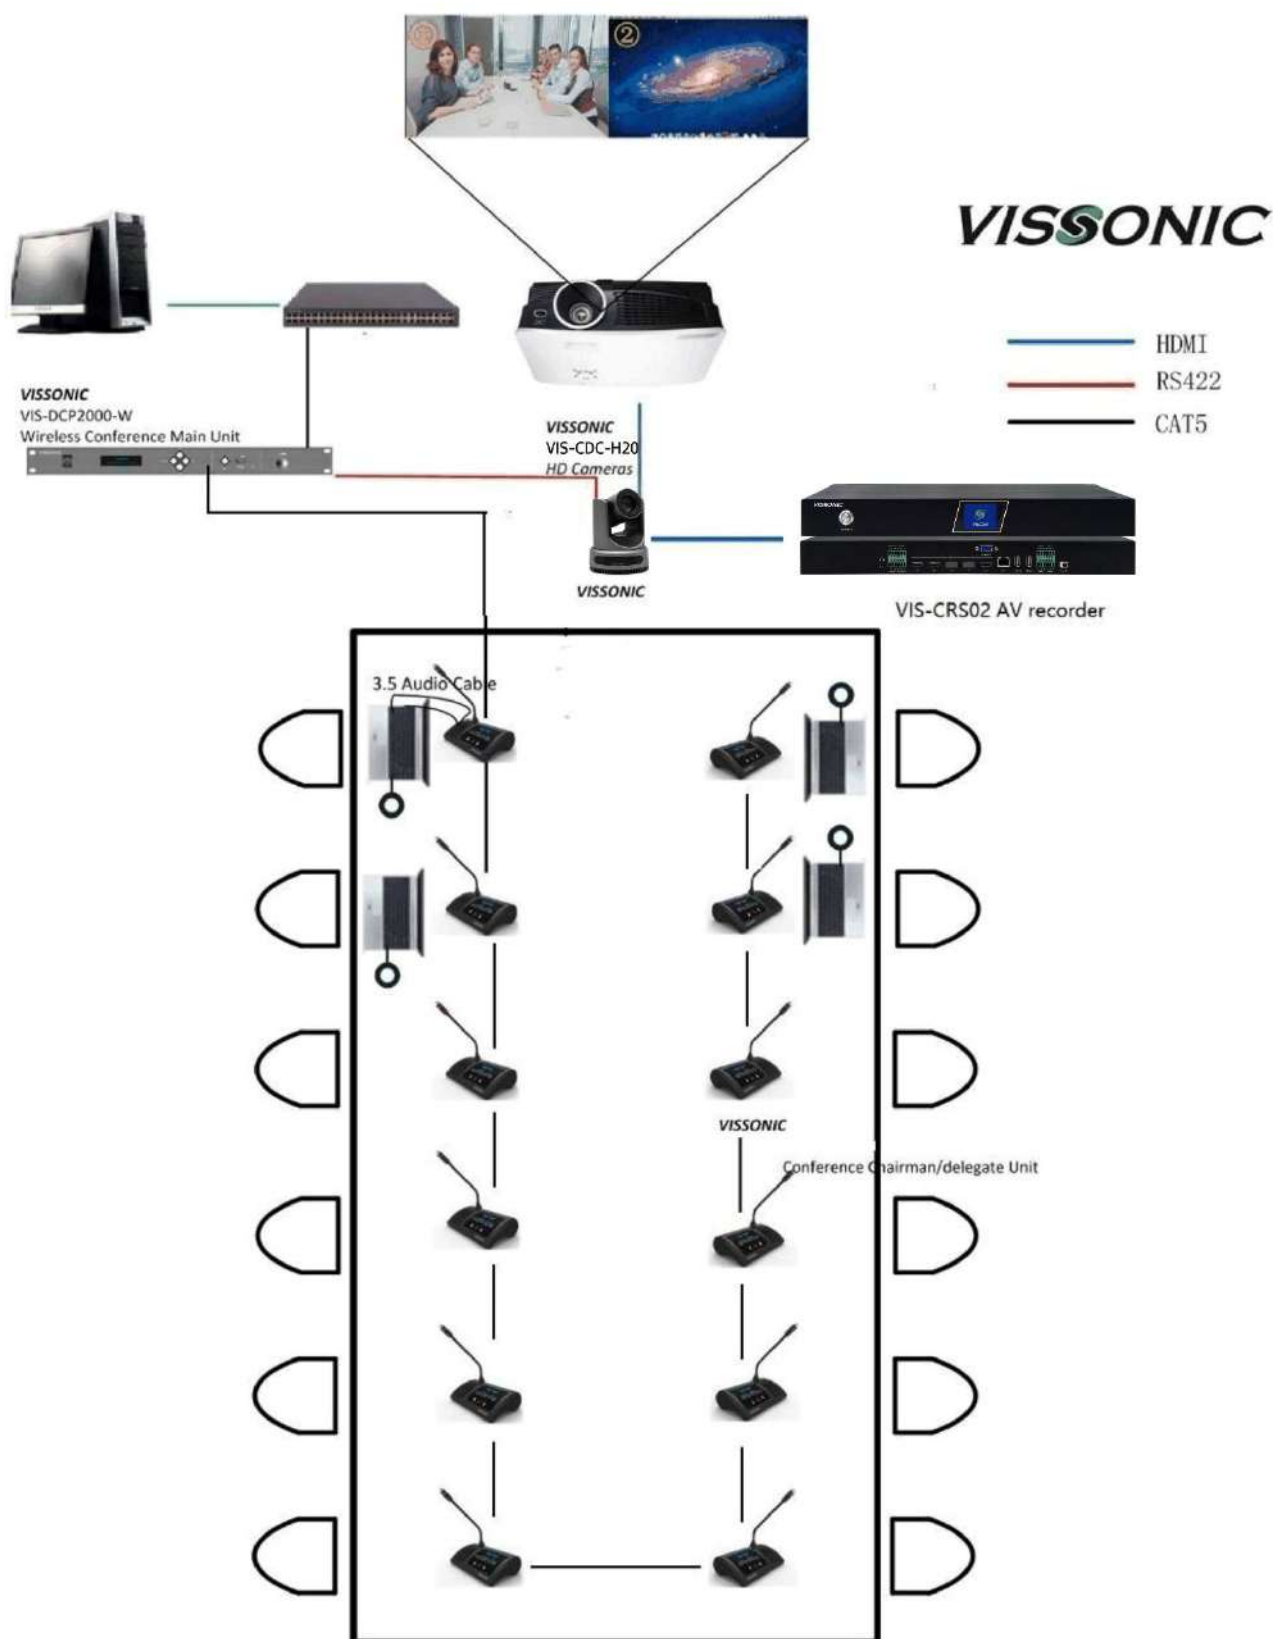

Audio/Video Conference Recording System

VIS-CRS02/03/04-B

Professional AV Recorder and camera tracking



Features

- Compact portable equipment, integrated high-definition video, audio, VGA, USB and other input and output interfaces.
- Support access HD and SD signals, automatic identification signal combined layout pattern of their choice, can be very convenient for video, audio and computer screen simultaneously recording signals and local preview playback.
- With 2-inch LCD screen, it can display recording and broadcasting status, channel status, network information, storage space and logo, etc.
- Recording and generating common MP4 video files.
- You can use PC manage and control system.
- HDMI, VGA dual output design. HDMI output video conference screen, VGA output directed interface.
- Working with conference controller DCP2000 to get the camera auto-tracking and recording system.
- Live broadcast under LAN or Ethernet.

Interface

- 1 × DC Power socket
- 2/3/4 × HDMI input
- 1 × HDMI output
- 1 × VGA output
- 2 × RS485
- 2 × RS232
- 2 × USB2.0
- 1 × Headphone jack of 3.5mm for monitoring
- 2 × AUDIO LINE IN, 2 × AUDIO LINE OUT
- 1 × RJ45 for Ethernet

Technical Parameter

Control

RS485/RS232: 3 pins 3.8mm phoenix connector

RJ45 connector 100m TCP/IP protocol

Others:

Power supply: DC 12V 3A, adapter

Chassis Specifications: 1U

Size: 482 (L) × 270 (W) × 45 (H) mm

Weight: 2kg

Item Model for Order

VIS-CDC-H20 20x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling Mount or wall mount bracket

VIS-CDC-H30 30x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling Mount or wall mount bracket

VIS-CKB1.....Camera Control Keyboard (Metal housing, Grey, 3D)

Audio/Video Conference Recording System

VIS-CRS05-B

Professional AV Recorder and camera tracking



Features

- Provide 5 channels of 4K video signal capture and encoding. It can realize 4K resolution from capture, recording to output.
- Up to 5 HDMI inputs and 4 HDMI outputs. HDMI output video conference screen.
- With 2-inch LCD screen, it can display recording and broadcasting status, channel status, network information, storage space and logo, etc.
- Compact portable equipment, integrated high-definition video, audio, USB and other input and output interfaces.
- Support access HD and SD signals, automatic identification signal combined layout pattern of their choice, can be very convenient for video, audio and computer screen simultaneously recording signals and local preview playback.
- Recording and generating common MP4 video files.
- You can use PC manage and control system.
- Working with conference controller DCP2000 to get the camera auto-tracking and recording system.
- Live broadcast under LAN or Ethernet.

Interface

- 1 × DC Power socket
- 5 × HDMI input
- 4 × HDMI output
- 2 × RS485
- 2 × RS232
- 2 × USB2.0, 1 × USB3.0, 1 × USB-OTG
- 1 × Headphone jack of 3.5mm for monitoring
- 2 × AUDIO LINE IN, 2 × AUDIO LINE OUT
- 1 × RJ45 for Ethernet

Technical Parameter

Control

RS485/RS232: 3 pins 3.8mm phoenix connector

RJ45 connector 100m TCP/IP protocol

Others:

Power supply: DC 12V 3A, adapter

Chassis Specifications: 1U

Size: 482 (L) × 270 (W) × 45 (H) mm

Weight: 2kg

Item Model for Order

VIS-CDC-H20 20x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling Mount or wall mount bracket

VIS-CDC-H30 30x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling Mount or wall mount bracket

VIS-CKB1.....Camera Control Keyboard (Metal housing, Grey, 3D)

VIS-CATC-A

Camera Auto-tracking Controller



Features

- 2 HDMI+ 4 HD/3G SDI input, 1+1 HDMI output.
- 6x1+1 seamless scaler switcher, maximum supported output resolution is 1080P@60Hz
- Seamless switching, no jitter, no blank screen.
- Adjustable image freezing function
- Web control function

Functions:

- Turn on/off the channel number indicators
- 6x1 seamless scaler switcher, maximum supported output resolution is 1080P@60Hz,
- Seamless switching, no jitter, no blank screen.
- Adjustable image freezing function (freezing time from 1 to 6 seconds, freezing time cannot be less than 0.5 second or freezing function would be turned off).
- RS232 and Ethernet port to work with central controller or CLEACON series or CLASSIC-D series conference main unit for camera auto-tracking function.

Interfaces

2x HDMI input

4x SDI input

2x HDMI-A

1x female DP9 and 1x male DP9

1xRJ45 for Ethernet

Technical Parameters

Video Input

Signal format/Quantity..... HDMIx2

Connector..... HDMI-A connectors

Pixel bandwidth..... 165MHz

Protocol..... HDMI 1.3a standard, HDCP1.3 protocol, DVI1.0 protocol

Support resolution..... 1280x720@50Hz;1280x720@60Hz;
1920x1080@25Hz; 1920x1080@30Hz; 1920x1080@50Hz;1920x1080@60Hz

Transmission distance.....less than 35m.

Signal format/Quantity.....SDI x4

Connector.....BNC female connectors

Pixel bandwidth.....165MHz

Video format.....Mbps SDI, 1.485Gbps HD-SDI and 2.97Gbps 3G-SDI

Support resolution.....1280x720@50Hz;1280x720@60Hz;
1920x1080@25Hz; 1920x1080@30Hz; 1920x1080@50Hz;1920x1080@60Hz

Transmission distance.....3G-SDI≤100m with certified SDI professional cable.

Output

Signal format/Quantity.....HDMI x2

Connector.....HDMI-A connectors

Pixel bandwidth.....165MHz

Support resolution.....1280x720x50Hz;1280x720x60Hz;

1920x1080x50Hz;1920x1080x25Hz;

1920x1080x30Hz;1920x1080ix50Hz;

1920x1080x60Hz;1920x1080ix60Hz;

Transmission distance.....HDMI≤7m with certified HDMI professional cable.

Control

RS232 control

Ethernet control

Front panel control

Mechanical

Dimensions (mm).....483L x 260W x43.6D

Weight.....3kg

Color.....black

VIS-CATC-B

Camera Auto-tracking Controller



Features

- 4 HD/3G SDI +2 HDMI input
- 1+1 HDMI output and one USB output.
- 6x1+1 seamless scaler switcher, maximum supported output resolution is 1080P@60Hz
- Seamless switching, no jitter, no blank screen.
- Adjustable image freezing function
- Bridging any high definition HDMI and audio source through USB into video conferencing applications such as Skype for Business, Zoom, Microsoft Teams

Functions:

- Turn on/off the channel number indicators
- 6x1 seamless scaler switcher, maximum supported output resolution is 1080P@60Hz,
- Seamless switching, no jitter, no blank screen.
- Adjustable image freezing function (freezing time from 1 to 6 seconds, freezing time cannot be less than 0.5 second or freezing function would be turned off).
- RS232 and Ethernet port to work with central controller or CLEACON series or CLASSIC-D series conference main unit for camera auto-tracking function.

Interfaces

1x RCA audio input
 2x HDMI input
 4x SDI input
 2x HDMI-A output
 1xUSB output
 1x female DP9 and 1x male DP9
 1xRJ45 for Ethernet

Technical Parameters

Audio Input

Signal format/Quantity..... RCAx1

Video Input

Signal format/Quantity..... HDMIx2
Connector..... HDMI-A connectors
Pixel bandwidth..... 165MHz
Protocol..... HDMI 1.3a standard, HDCP1.3 protocol, DVI1.0 protocol
Support resolution..... 1280x720@50Hz;1280x720@60Hz;
1920x1080@25Hz; 1920x1080@30Hz; 1920x1080@50Hz;1920x1080@60Hz
Transmission distance..... less than 35m.

Signal format/Quantity..... SDIx4
Connector..... BNC female connectors
Pixel bandwidth..... 165MHz
Video format..... Mbps SDI, 1.485Gbps HD-SDI and 2.97Gbps 3G-SDI
Support resolution..... 1280x720@50Hz;1280x720@60Hz;
1920x1080@25Hz; 1920x1080@30Hz; 1920x1080@50Hz;1920x1080@60Hz
Transmission distance..... 3G-SDI≤100m with certified SDI professional cable.

Output

Signal format/Quantity..... HDMIx2
Connector..... HDMI-A connectors
Pixel bandwidth..... 165MHz
Support resolution..... 1280x720x50Hz;1280x720x60Hz;
1920x1080x50Hz;1920x1080x25Hz;
1920x1080x30Hz;1920x1080ix50Hz;
1920x1080x60Hz;1920x1080ix60Hz;
Transmission distance..... HDMI≤7m with certified HDMI professional cable.

Signal format/Quantity..... USBx1
Interface..... USB2.0: Type A female jack

Control

RS232 control
Ethernet control
Front panel control

Mechanical

Dimensions (mm)..... 483L x 260W x43.6D
Weight..... 3kg
Color..... black

VIS-CKB2

Camera Control Keyboard



Features

- Wide protocol support: VISCA, PELCO D/P, ONVIF, VISCA over IP
- Cross-protocol mixed control via RS232/RS422 and IP
- Quick access to key camera functions
- Variable-speed four-dimensional joystick control
- Dual power input options: 12V DC and PoE

Functions

- The controller supports mixed control via RS-232, RS-422/485, and IP, allowing control of cameras in a single system.
- Through IP control, the controller can automatically search for IP cameras in the system and quickly assign IP addresses. Supports Onvif and VISCA over IP
- Unlimited controllers can operate on a single network, controlling up to 255 cameras (using combinations of PELCO, VISCA, ONVIF IP, and VISCA over IP protocols)
- Features an imported variable-speed four-dimensional joystick for comfortable control, allowing full movement and zoom adjustment of conference cameras with speed based on joystick pressure
- Zoom adjustment is conveniently managed with a boat-type switch, providing powerful functionality
- Supports parameter configuration for front-end devices via IE browser
- Up to 6 shortcut control buttons for quick operation of conference video cameras
- Dual power input options: 12V DC and PoE.

Control & Indicators

LCD display

Four-dimensional Variable-Speed joystick Camera Knob

Quick Access to Camera Functions

Dual Power Input

Interface

1xEthernet port

1xRS232 port

4xRS-422/485 interface / RJ-45 port (1~4)

Tally / Contact: Tally control interface.

Technical Parameters

Power Supply: DC 12V-2A (Inner Positive, Outer Negative)

Buttons: Soft-touch silicone buttons

Display: 128×32 LCD

Audio Prompt: Key press sound notification (On/Off)

Power Consumption: 0.6W max

Supported Protocols: Fully compatible with VISCA, ONVIF 2.4, PECLO D/P

Operating Temperature: 0°C to 55°C / 14°F to 131°F

Operating Humidity: 20% to 80% (non-condensing)

Storage Temperature: -10°C to 60°C / 14°F to 140°F


Storage Humidity: 0% to 90% (non-condensing)

Dimensions: 277.8×149.9×110.4 mm

Warranty: 1 year

Net Weight: 1282g

Digaram

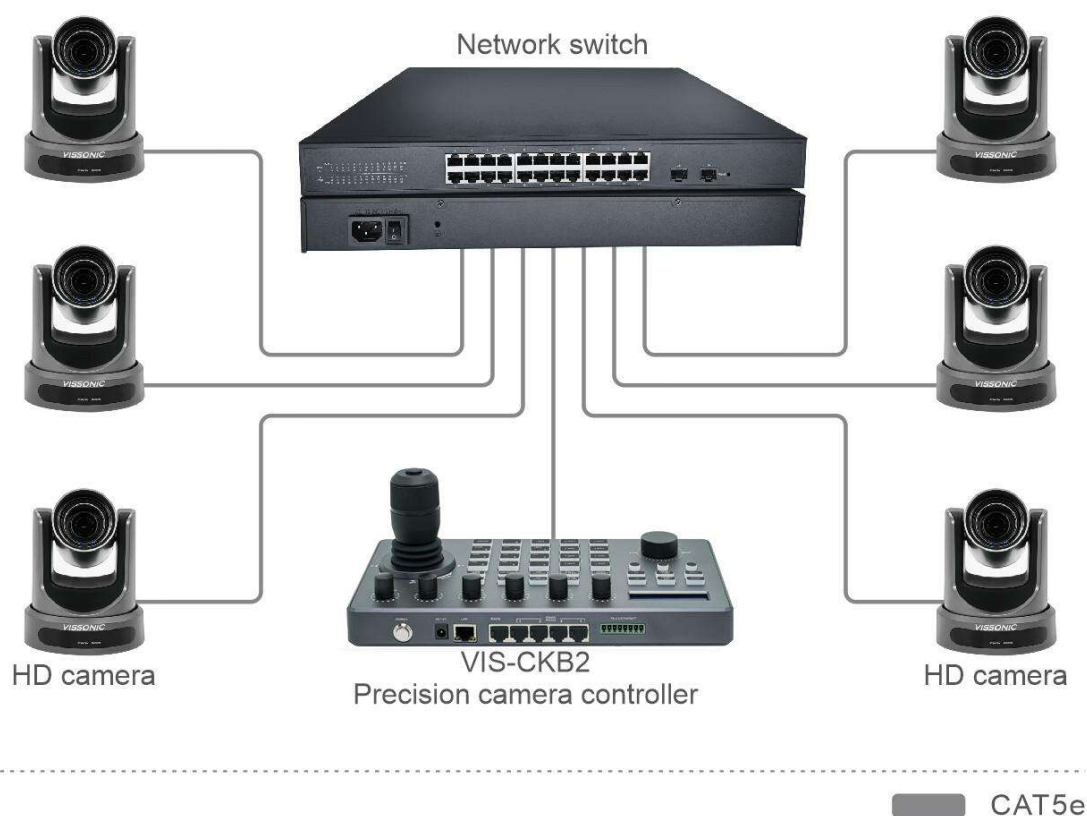



Features

- H.265 support
H.265 encoding supports conference cameras, and can realize full HD 1080p/60fps video streaming through ultra-low bandwidth.
- 1080P Full HD and NDI®|HX (optional)
Using a new generation of Panasonic's 1/2.8 inch high-quality high-definition CMOS sensor with 2.07 million effective pixels, it can achieve high-quality images with a maximum resolution of 1920x1080.
- Ultra high frame rate
The output frame rate of 1080P is up to 60fps, the output frame rate of 720P is up to 120fps (only supported by the network), and 640x480P can be up to 240fps (only supported by the network, optional).
- AAC audio coding
Supports AAC audio coding, with better sound quality and smaller bandwidth. EQ auto adjustment to reduce noise and support mic input.
- USB3.0 and various ports
USB3.0 ports makes it can work with popular video conference software like teams, zoom. All type of video output ports including HDMI, 3G-SDI. Effective transmission distance up to 150 meters (1080p30 or less). HDMI, SDI, and network can be output simultaneously.
- The low light and high SNR of the CMOS sensor combined with 2D and 3D noise reduction algorithms effectively reduces the noise. Even under low illumination conditions, the picture can still be kept clear and clear.
- 20x Optical + 32x Digital Zoom Use TAMRON high quality super telephoto lens, support 20x optical zoom, and 32x digital, 30x Optical + 16x Digital Zoom(Model VIS-CDC-H30).
- Remote Control
Using RS232/485 interface, all the parameters of the camera can be remote controlled by the high-speed communications. LAN port with VISCA over IP control feature.

Item Model for Order

VIS-CDC-H20 20x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling Mount or wall mount bracket

VIS-CDC-H30 30x optical zoom, USB3.0, HDMI, SDI, can choose Ceiling Mount or wall mount bracket

Specification

VIS-CDC-H20/ VIS-CDC-H30	
Video System	HD: 1080p/60, 1080p/50, 1080i/60, 1080i/50, 1080p/30, 1080p/25, 720p/120 (supported by network only), 720p/60, 720p/50, 720p/30, 720p/25, 640x480p/240 (supported by network only, optional) SD: 480i, 576i
Sensor	1/2.8", CMOS, Effective Pixel: 2.07M
Scanning Mode	Progressive
Lens	20x, f4.42mm ~ 88.5mm, F1.8 ~ F2.8, or 30x, f4.3mm ~ 129.0mm, F1.8 ~ F2.8(Model VIS-CDC-H30)
Minimal Illumination	0.5 Lux @ (F1.8, AGC ON)
Shutter	1/30s ~ 1/10000s
White Balance	Auto, 3000K/Indoor, 4000K, 5000K/Outdoor, 6500K_1, 6500K_2, 6500K_3, One Push, Manual
Backlight Compensation	Support
Digital Noise Reduction	2D&3D Digital Noise Reduction
Video S/N	≥55dB
Horizontal Angle of View	60.7°~ 3.36°
Vertical Angle of View	34.1°~ 1.89°
Horizontal Rotation Range	±170°
Vertical Rotation Range	-30°~ +90°
Pan Speed Range	1.7°~ 100°/s
Tilt Speed Range	1.7°~ 69.9°/s
H & V Flip	Support
Image Freeze	Support
Local Storage	Support
Number of Preset	255
Preset Accuracy	0.1°
USB Featured	
Operate System	Windows 10 or higher, Windows 7, Windows 8, Mac OS X, Linux
Color System	YUV 4:2:2/MJPEG/H.264
Video Format	USB3.0 : 1080p/60, 1080p/50, 1080p/30, 1080p/25, 720p/60, 720p/50, 720p/30, 720p/25 USB2.0 : USB2.0:960x540p/30, 960x540p/25, 640x360p/60, 640x360p/50

USB Video Communication Protocol	UVC 1.0
UVC PTZ	Support
IPC Features	
Video Compression	H.265/H.264/MJPEG
Video Stream	Main Stream, Sub Stream
Main Stream Resolution	1920x1080, 1280x720, 1024x576
Sub Stream Resolution	720x576, 720x480, 320x240
Video Bit Rate	128Kbps ~ 8192Kbps
Bit Rate Type	Variable Rate, Fixed Rate
Frame Rate	50Hz: 1fps ~ 50fps, 60Hz: 1fps ~ 60fps, 720p120: 120fps, 640x480p240: 240fps
Audio Compression	AAC
Audio Bit Rate	96Kbps, 128Kbps, 256Kbps
Support protocols	NDI, TCP/IP, HTTP, RTSP, RTMP, Onvif, DHCP, Multicast, etc.
Input/Output Interface	
HD Output	1xHDMI: Version 1.3 1x3G-SDI: BNC type, 800mVp-p, 75Ω, Along to SMPTE 424M standard
SD Output	1xCVBS: 3.5mm mini jack, 1Vp-p, 75Ω
Network Interface	1xRJ45: 10M/100M Ethernet Interface
Audio Interface	1-ch: 3.5mm Audio Interface, Line In
USB	1xUSB3.0: Type A female jack
Communication Interface	1xRS232 In: 8pin Min DIN, Max Distance: 30m, Protocol: VISCA/Pelco-D/Pelco-P
	1xRS232 Out: 8pin Min DIN, Max Distance: 30m, Protocol: VISCA network use only
	1xRS485: 2pin Phoenix Port, Max Distance: 1200m, Protocol: VISCA/Pelco-D/Pelco-P
Power Jack	JEITA type (DC IN 12V)
Generic Specification	
Input Voltage	DC 12V
Current Consumption	1.0A (Max)
Operating Temperature	-10°C ~ 40°C (14°F ~ 104°F)
Storage Temperature	-40°C ~ 60°C (-40°F ~ 140°F)
MBTF	≥30000 hours

Power Consumption	12W (Max)
Size	169mm x 142mm x 164mm
Net Weight	1.35Kg (3.0lb)

About VISSONIC Electronics Limited

Our mission is to develop and manufacture the most comprehensive and innovative audio visual products for our clients. We provide the best performance/price ratio products because it could give you satisfaction just from the time you use them, we believe the good design with cutting edge technology on products will provide value to all our partners and end users. Listen to your demands, we fulfill it.



4/F, Building 6, No. 50 Nanxiang 1st Road, Huangpu district, Guangzhou, China

• Tel: +86-020-82515140 • E-mail: info@vissonic.com

@2024 VISSONIC Electronics Ltd. all rights reserved.